



12T HYDRAULIC CYLINDER IN ALUMINIUM, STROKE 43 mm



12 TON

43 mm

ALUMINIUM


Application

Example of application:
Hydraulic cylinder used with the complete set for removing injectors, Govoni GO405.



Technical data

Force: 12 ton
Stroke: 43 mm
Dimensions: Ø90x155 mm
Pressure: max. 700 Bar
Hole: Ø20 mm
Connection: 3/8" -18 NPT
Mounting thread: 2" 3/4-16 UN
Material: aluminium
Adaptors: M10/M12/M14/M16/M18

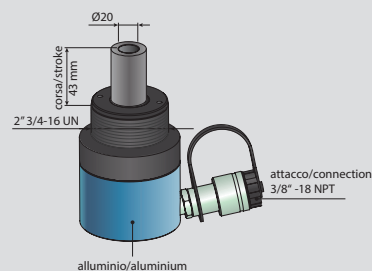

- The mechanical properties, the shape and dimensioning for which they were designed, ensure that Govoni hydraulic cylinders have a field of use to the automotive industry as:
 - Injectors disassembly;
 - Bearings, hubs and silent blocks disassembly;
 - Coaxial unlocking of very tight mechanical components.
- Equipped with 5 threaded bushes in order to fit the most relevant threaded bars on the market.
- Operation/Working with hydraulic pump with connection, Govoni **GO1030**.

	BUSHING CODE	MEASUREMENT OF BUSHING/THREADED ROD
 M18x1,5	270044011	M18x1.5
 M16	270044010	M16
 M14	270044009	M14
 M12	270044008	M12
 M10	270044007	M10

